



MGT GLOBAL

FRIGO YARI RÖMÖRK **FRIGO REFRIGERATED SEMI TRAILER**



mgtglobal.com.tr



Teknik Özellikler

İzin Verilen Maksimum Yüklü Ağırlık	İzin Verilen Maksimum King-pin Yüklü	İzin Verilen Maksimum Axles Yüklü	Boş Ağırlık – Soğutucu Hariç	Boy - mm	Genişlik - mm	Toplam Yükseklik	Kutu İç Yüksekliği
35500 Kg	11500 Kg	8,000Kgx3 Axles 24,000 Kg	±7700 Kg Ortalama	Dıştan: 13600 İçten: 13370	Dıştan: 2600 İçten: 2460	4000 mm	2655 mm

Sasi:

- 4 mm Domex – SSAB, Düşük Alaşımli, Son Derece Temiz Çelikten, Yüksek Dayanımlı Sıcak Haddelenmiş Çelik Sacdan Yapılmıştır.
- Alt Ve Üst Lama 120x10 mm
- King-pin Tablası : ST52 – Kalınlık: 10 mm

Dingler: 3 X 9 Ton – SAF yada BPW Markası
Disk Birinci Dingil Kaldırmalı

Süspansiyon Sistemi: Havalı Süspansiyon Sistemi

Lastik: 385/ 65 R22.5 (BRIDGESTONE) – 7 Adet

Jantlar: Çelik Jant 11,75 X 22,5 – 7 Adet

Ayaklar: 25 Ton Kapasite – SAF Markası

King-pin: 2 Inch – SAF Markası

Fren Sistemi: WABCO EBS – Standart Göre

Elektrik Sistemi: 24 Volt / 2 X 7 + 15 Pin Plug Soket, 75/756/EEC Standart Göre

ASPOCK, SABA yada SANEL Tam Led Sistemi Standart Göre

Yakıt Tank: 250-600 Lt – Seviye Göstergeli Alüminyum Tank

Kutu – Yan Duvar: 65 mm Total :

- 60 mm Ekstrüde Polistiren Köpük – XPS PLUS T LB GV / Dansite 35 Kg/m³ –standart : EN1602
- Dış Tabaka : 2 mm CTP Fiberglass Örgülü
- İç Tabaka : 2 mm CTP Fiberglass Örgülü

Kutu – Tavan : 85 mm Total :

- 80 mm Ekstrüde Polistiren Köpük–XPS PLUS T LB GV Dansite 35 Kg/m³ –standart : EN1602
- Dış Tabaka : 2 mm CTP Fiberglass Örgülü
- İç Tabaka : 2 mm CTP Fiberglass Örgülü

Kutu – Ön Duvar: 85 mm Total

- 80 mm Ekstrüde Polistiren Köpük–XPS PLUS T LB GV / Dansite 35 Kg/m³ –standart : EN1602
- Dış Tabaka : 2 mm CTP Fiberglass Örgülü
- İç Tabaka : 2 mm CTP Fiberglass Örgülü
- 1700 X 1175 mm Boyutlarında Soğutma Ünitesinin Yerleştirilmesi
- İçin Duvarın İçindeki Çelik Yapı İle Desteklenmiştir.

Arka Kapılar: 85 mm Total :

- 80 mm Ekstrüde Polistiren Köpük–XPS PLUS T LB GV / Dansite 35 Kg/m³ –standart : EN1602
- Dış Tabaka : 2 mm CTP Fiberglass Örgülü
- İç Tabaka : 2 mm CTP Fiberglass Örgülü
- Arka Çerçeve Paslanmaz (Chrome 304 L)
- Her Kapıda 4 Adet Menteşe Mevcuttur – Paslanmaz Krom 304
- Her Kapıda 2 Takım Kilit Sistemi – Paslanmaz Krom 304

Taban: 125 mm Total :

- 100 mm Ekstrüde Polistiren Köpük–XPS PLUS T RTM GV / Density 40 Kg/m³ – Standart : EN1602
- Üst Tabaka : 3mm Baklavalı Alüminyum
- Orta Tabaka : 21 mm Plywood
- Alt Tabaka : 2 mm CTP Fiberglass Örgülü



Arka Rampa Takoğu : Yüksek Kaliteli Kauçuktan Yapılmış 500x90 mm / 6 Adet: 2 Adet Dikey ve 4 Adet Yatay

Yan Bariyer: 2 Tarafta – Alüminyum Profilden Yapılmıştır – Standart Uyum

Boya: RAL 9016 : Öncelikle Kumlama Yapılacaktır, Sonra Bir Kat Epoksi, Sonra 2 Kat Boya Yapılacaktır.

Sertifikalar: ATP / FRC

Aksesuarlar: 2 ECE R70 Reflektör Yan Duvarlar Beyaz Reflektör Şeritler, Arka Kapılarda Kırmızı Reflektör Şeritler
1X Teker Takoğu , 1X Malzeme Sandığı, 1X Yemek Sandığı, Çiftli Teker Stepne, Su Tankı – Krom , Yangın Dolabı

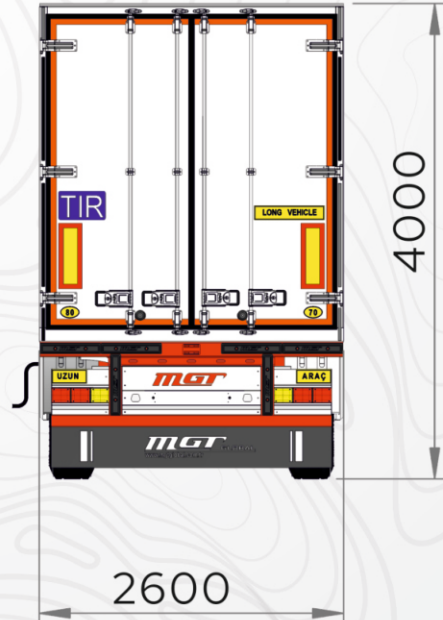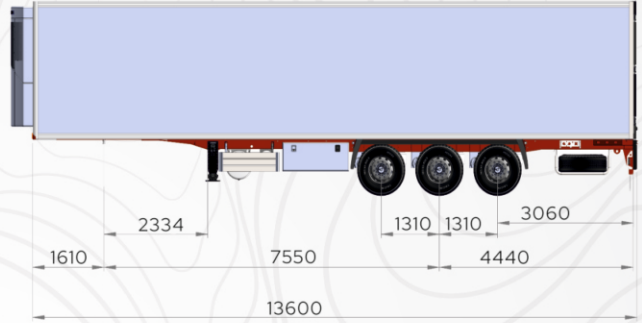



Technical Specifications

Permissible Max Laden Mass	Permissible Max On King-pin	Permissible Max On Axles	Total Self Weight Without Cooling Unit	Overall Length mm	Max Width mm	Trailer Height	Box Internal Height
35500 Kg	11500 Kg	8000Kgx3 Axles 24000 Kg	±7700 Kg Approximately	Outside: 13600 Internal: 13370	Outside: 2600 Internal: 2460	4000 mm	2655 mm

Chassis :

4 mm Domex – SSAB Is Made From Extremely Clean Steel, High-strength Hot-rolled Sheet Steel With Low-alloy Lower And Upper Lama 120x10 mm / King-pin Plate: ST52 – Thick: 10mm

Axles: 3 X 9 Ton – SAF or BPW Brand – Disc With 1 Lifting Axle

Suspension System : Air Suspension System

Tires: 385/ 65 R22.5 (BRIDGESTONE) – 7 Piece

Rims: Steel Rims 11,75 x 22,5 – 7 Piece

Landing Gears: 25 Ton Cpacity – SAF Brand

King-pin: 2 Inch – SAF Brand / Load = 11,500 kg

Break System: WABCO EBS – According to EU Standard

Electric System : 24 Volt / 2 x 7 + 15 Pin Plug Socket, According to Directive 75/756/EEC ASPOCK ,SABA or SANEL With Full Led System According to EU Standard

Fuel Tank : 250–600 Lt – Aluminum With Level Indicator

Box Sides : 65 mm Total :

- 60 mm Extruded Polystyrene Foamboard –XPS PLUS T LB GV / Density 35 kg/m3 –Standard : ENI602
- Outer Layer : 2 mm Fiberglass Reinforced With Mesh Plastic
- Inner Layer : 2 mm Fiberglass Reinforced With Mesh Plastic

Box Roof : 85 mm Total :

- 80 mm Extruded Polystyrene Foamboard –XPS PLUS T LB GV / Density 35 kg/m3 –Standard : ENI602
- Outer Layer : 2 mm Fiberglass Reinforced With Mesh Plastic
- Inner Layer : 2 mm Fiberglass Reinforced With Mesh Plastic

Front Wall : 85 mm Total

- 80 mm Extruded Polystyrene Foamboard –XPS PLUS T LB GV / Density 35 kg/m3 –standard : ENI602
- Outer Layer : 2 mm Fiberglass Reinforced With Mesh Plastic
- Inner Layer : 2 mm Fiberglass Reinforced With Mesh Plastic
- Supported With Steel Structure Inside the Wall to Place the Cooling Unit With Dimension WX H : 1700 x 1175 mm

Rear Doors : 85 mm Total :

- 80 mm Extruded Polystyrene Foamboard –XPS PLUS T LB GV / Density 35 kg/m3 –standard : ENI602
- Outer Layer : 2 mm Fiberglass Reinforced With Mesh Plastic
- Inner Layer : 2 mm Fiberglass Reinforced With Mesh Plastic
- With Stainless Steel Frame (Chrome 304 L)
- Each Door 4 Hinges – Stainless Steel Chrome
- Each Door 2 Set of External Locks System – Stainless Steel Chrome

Flooring : 125 mm Total :

- 100 mm Extruded Polystyrene Foamboard –XPS PLUS T RTM GV/ Density 40 Kg/m3–Standard : ENI602
- Upper Layer : 3mm Checkered Aluminum
- Middle Layer : 21 mm Plywood
- Lower Layer : 2 mm Fiberglass Reinforced With Mesh Plastic



Rear Ramp Buffer : Made Of Rubber With High Quality 500x90 mm / 6 PCS : 2 PCS Vertical And 4 PCS Horizontal

Side Guard : On the 2 Sides – Made From Aluminium Profile According to the Standard

Paint : RAL 9016 : Sandblasting Will Be Done Firstly , Then Anti Corrosion Paint One Layer Epoxy ,then 2 Layers Of Paint .

Certificate : ATP / FRC

Accessories : 2 ECE R70 Reflectorsside Walls Reflective Strips White, Rear Panel Reflective Strips Red, 1X Plastic Anti-slip Wheel Stopper, 1X Tool Box, 1X Food Box, Spare Tire Carrier For 2 Tires Water Tank – Chrome Distinguish Fire Box

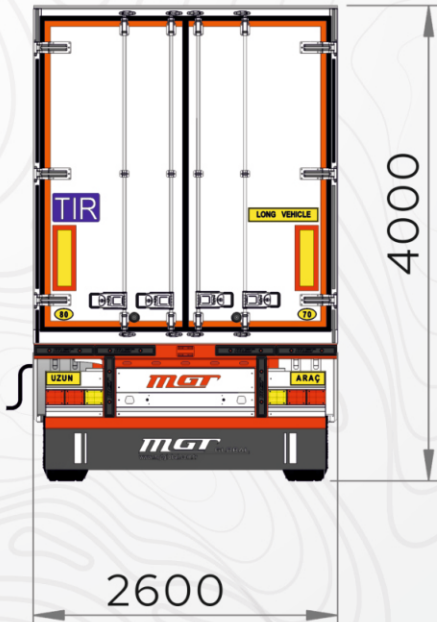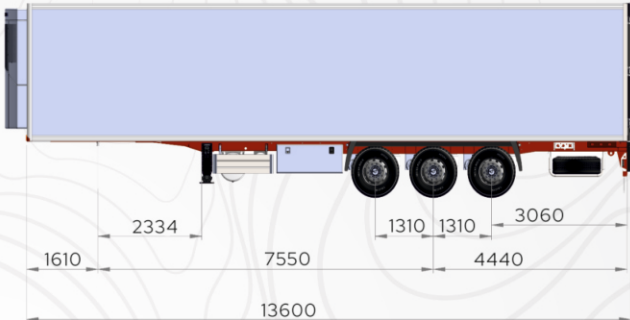



MGT GLOBAL

Güzelburç Mah. Cemil Meriç Cad.
No: 19/8 ANTAKYA - HATAY / TURKEY
Phone: +90 326 503 72 74
info@ mgtglobal.com.tr
mgtglobal.com.tr

